



TEREX

TH636C

Telehandler

OPERATING WEIGHT	21,080 lbs (9,562 kg)
NET ENGINE POWER	99 hp (73.8 kW)
MAXIMUM LIFT CAPACITY	6,000 lbs (2,722 kg)
MAXIMUM LIFT HEIGHT	36' (11.0 m)



TELEHANDLER TH636C

Specifications

Performance

Operating weight with forks	21,080 lbs (9,562 kg)
Inside/outside turn radius	4' 5" / 12' 11" (1.35 / 3.94 m)
Maximum lifting height	36' (11.0 m)
Reach at maximum height	30" (0.76m)
Maximum forward reach	21' (6.4 m)
Maximum lift capacity	6,000 lbs (2,722 kg)
Payload at maximum height	6,000 lbs (2,722 kg)
Payload at maximum reach	2,000 lbs (905 kg)

Steering

Power assisted steering

Three steering modes: 2-wheel, 4-wheel coordinated, and 4-wheel crab

Engine

John Deere 4045T	
4 cylinders turbocharged diesel	
Power @ 2,500 rpm	Std. 99 hp (73.8 kW)
Tier II Compliant	

Transmission

3 Speed Powershift/Torque Converter	
4 wheel drive	
Front axle differential lock	
Maximum speed	17.2 mph (27.7 km/h)

Brakes

Inboard multiple wet disc

Telehandler TH636C

Specifications

Sway Control - Frame Leveling

Circuit isolated cylinders, 10 degrees either side of center

Frame Stabilizer

Twin rear axle lock cylinders

Hydraulic System

Pressure compensated hydraulic system

Variable-displacement axial piston pump

10 Micron filtration

Tank Capacities

Fuel 30 gal (113.6 L)

Hydraulic oil 34 gal (128.7 L)

Tires

1300 x 24-12 ply, calcium chloride solution filled

Forks and Attachment Holder Plate

Length 48" (1,200 mm)

Section 4" x 2" (102 mm x 51 mm)

Operating Cab

Structure conforms to ISO 8471 (ROPS) and ISO 8449 (FOPS)

Optional enclosed cab, heater and air conditioning

Attachments and Fork Options

Cubing tines

Pallet forks 60" & 72" (1.52 & 1.83 m)

Rotating fork frames 48", 60", & 72" (1.22, 1.52, & 1.83 m)

45° Swing fork frames 60" & 72" (1.52 & 1.83 m)

Rubbish bucket 1 yd³ (0.76 m³)

Variable reach truss boom

Quick switch attachment

Auxiliary hydraulic circuit

Dimensions with Boom Retracted and Down


Overall L x W x H 22' 5" x 8' 6" x 8' 4" (6.83 x 2.59 x 2.54 m)

Wheelbase 10' 4" (3.15 m)

Turning radius (outside tire) 12' 11" (3.94 m)

Ground clearance 1' 5" (.43 m)

Working Ranges and Lift Capacities

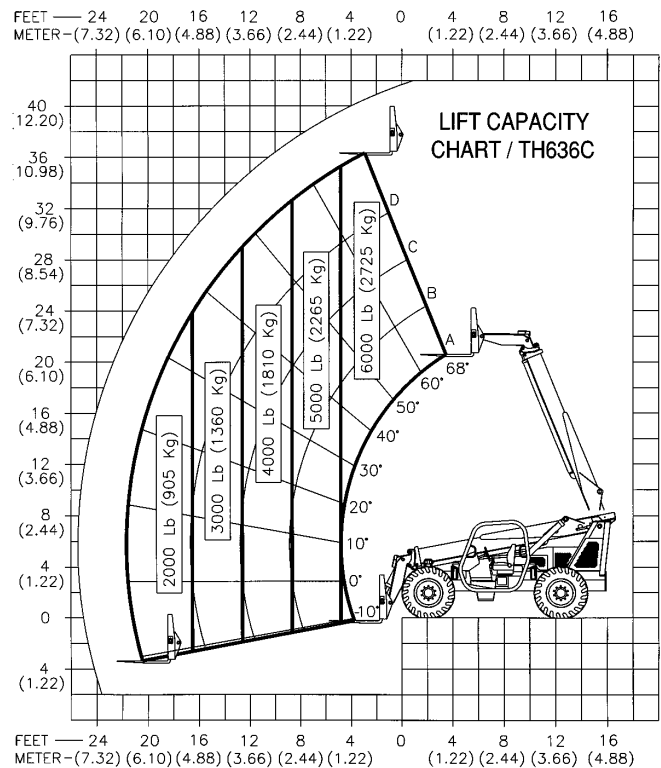

TEREX Handlers

455 N. Superior Ave.
Baraga, MI 49908
USA

TEL 906-353-3500
SALES 800-906-6174
PARTS & TECH SUPPORT 800-906-6174
WEB terex.com

For more information, product demonstration, or details on purchase, lease and rental plans, please contact your local TEREX Distributor.